

d2中英文说明书, 60*88

MANUAL EVOLVEO® CellCharge S2



CZ
EN

R26IM-EVO03

ÚVOD

EVOLVEO CellCharge S2 je dvouslotová inteligentní nabíječka pro podporované Li-ion a Ni-MH/Ni-Cd akumulátory z napájení USB-C DC 5 V. Každý slot pracuje samostatně, nabíječka rozpozná typ článku a stav nabíjení zobrazuje na LCD displeji.

- Používejte pouze podle pokynů v tomto manuálu.
- Součástí balení je USB kabel; síťový adaptér není součástí balení.
- Používejte pouze kvalitní zdroj USB-C DC 5 V / 2 A.

BEZPEČNOSTNÍ POKYNY

- Zařízení nevystavujte dešti, vlhkosti, ponoření do vody, pádu ani silným nárazům.
- Nabíjejte jen nepoškozené a kompatibilní akumulátory. Nemíchejte různé typy článků v rozporu s jejich určením.
- Nepoužívejte poškozený USB kabel, deformované baterie ani baterie s únikem elektrolytu.
- Při vkládání dodržte správnou polaritu. Zabraňte zkratu kontaktů baterie kovovými předměty.
- Nabíječku nerozebírejte ani neopravujte svépomocí. V případě závady ji odpojte od napájení.
- Udržujte mimo dosah dětí. Mladiství smí nabíječku používat pouze pod dohledem dospělé osoby.

HLAVNÍ VLASTNOSTI

- LCD displej
- Auto stop
- 2 sloty
- Test kapacity
- Li-ion / Ni-MH / Ni-Cd
- Rychlé nabíjení
- USB-C vstup
- Ochrana

POUŽITÍ

- Li-ion 3,6/3,7 V (max. 75 mm): 10440, 14500, 14650, RCR16340, 16650, 17500, 17650, 17670, 18350, 18490, 18500, 18650, 20700, 21700, 22700, 26650, 26700.
- Ni-MH/Ni-Cd 1,2 V: AA, AAA, AAAA, C, SC, F6.

INDIKACE NABÍJENÍ


Ikona	Stav nabití
	Bez napájení
	6-25 %
	26-50 %
	51-75 %
	76-100 %

Vybité nebo hluboce podvybité články nemusí být obnoveny. Doba nabíjení se liší podle typu, kapacity a stavu baterie

DOPORUČENÍ

- Po dokončení nabíjení baterie vyjměte a nabíječku odpojte od napájení.
- Nabíječku používejte v suchém a dobře větraném prostředí.

POPIS ZAŘÍZENÍ

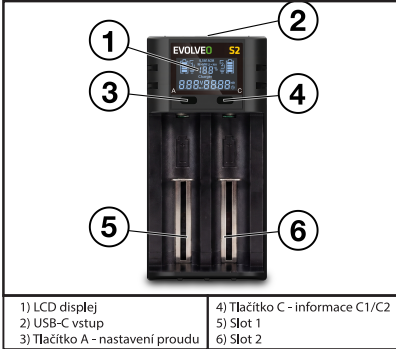

UPOZORNĚNÍ

- Používejte standardní napájecí zdroj USB-C DC 5 V / 2 A. Při slabším zdroji se nabíjecí proud sníží a nabíjení nemusí probíhat správně.
- Nepřipojujte zdroj s napětím vyšším než 5,5 V, mohlo by dojít k poškození nabíječky.
- Ochrana proti zkratu chrání nabíječku, nezabrání však vnitřnímu poškození vadné baterie.
- Ne nabíjejte poškozené, neznámé, zkorodované nebo neodpovídající baterie.
- Udržujte nabíječku mimo prach, zdroje tepla a přímé slunce.
- Při neobvyklém zahřívání, zápachu, kouři nebo chybě indikací nabíjení baterií ihned vyjměte a nabíječku odpojte.

PARAMETRY NABÍJENÍ

Režim	Hodnota
Vstup	USB-C DC 5 V / 2 A
Nabíjecí proud	0,5 A / 1 A / 2 A
Ukončovací napětí	Li-ion 4,20 +/- 0,05 V; Ni-MH/Ni-Cd 1,48 +/- 0,1 V
Rozměry	123 x 60 x 30 mm
Hmotnost	80,3 g bez baterií, včetně kabelu

PROHLÁŠENÍ

EVOLVEO CellCharge S2 je dodávána bez síťového adaptéru, pouze s USB-C kabelem. Výrobek neobsahuje bezdrátový modul a není rádiovým zařízením.



PROHLÁŠENÍ O SHODĚ

Společnost Abacus Electric, s.r.o. prohlašuje, že univerzální LCD USB-C nabíječka baterií EVOLVEO CellCharge S2 splňuje požadavky předpisů relevantních pro tento typ zařízení:

- Směrnice 2014/30/EU (EMC) - elektromagnetická kompatibilita.
- Směrnice 2011/65/EU a 2015/863/EU (RoHS) - omezení nebezpečných látek.

Plné znění prohlášení o shodě naleznete na:

<http://ftp.evolveo.com/ce/>



LIKVIDACE

Elektrická zařízení, baterie a akumulátory po skončení životnosti odezďte odděleně v rámci tříděného odpadu. Nevyhazujte do komunálního odpadu.

www.evolveo.cz/recycling



FSC certifikace se vztahuje na použité obalové/papírové materiály označené logem FSC.

Dovozce / výrobce:

Abacus Electric, s.r.o., Planá 2, 370 01, Česká republika
helpdesk@evolveo.com

Vyrobeno v P.R.C.

www.evolveo.com

Copyright © Abacus Electric, s.r.o.

Vzhled a technická specifikace se mohou změnit bez předchozího upozornění.

INTRODUCTION

The EVOLVEO CellCharge S2 is a dual-slot intelligent charger designed for Li-ion, Ni-MH, Ni-Cd rechargeable batteries and powered via USB-C DC 5 V. Each slot operates independently, automatically detects the battery type, and displays the charging status on the LCD screen.

- Use the device only according to the instructions in this manual.
- A USB cable is included in the package; a USB power adapter is not included.
- Use only a high-quality USB-C DC 5 V / 2 A power source.

SAFETY INSTRUCTIONS

- Do not expose the device to rain, moisture, water immersion, drops, or strong impacts.
- Charge only undamaged and compatible rechargeable batteries. Do not mix different battery types contrary to their intended use.
- Do not use a damaged USB cable or deformed, leaking batteries.
- Observe the correct battery polarity when inserting batteries. Prevent the battery terminals from coming into contact with metal objects.
- Do not disassemble or attempt to repair the charger yourself. In the event of a malfunction, disconnect it from the power supply.
- Keep out of reach of children. Minors may use the charger only under adult supervision.

KEY FEATURES

- LCD display
- Auto stop
- Dual-slot design
- Capacity test
- Li-ion / Ni-MH / Ni-Cd compatibility
- Fast charging
- USB-C input
- Protection features

APPLICATION

- Li-ion 3,6/3,7 V (max. 75 mm): 10440, 14500, 14650, RCR16340, 16650, 17500, 17650, 17670, 18350, 18490, 18500, 18650, 20700, 21700, 22700, 26650, 26700.
- Ni-MH / Ni-Cd 1.2 V: AA, AAA, AAAA, C, SC, F6.

CHARGING STATUS INDICATION


Icon	Charge Status
	No power
	6-25 %
	26-50 %
	51-75 %
	76-100 %

Completely discharged or deeply discharged batteries may not be recoverable. Charging time varies depending on the battery type, capacity, and state of charge.

RECOMMENDATIONS

- Remove the batteries after charging is complete and disconnect the charger from the power supply.
- Use the charger only in a dry and well-ventilated environment.

PRODUCT OVERVIEW

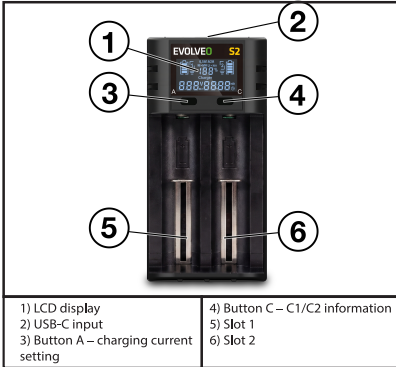

WARNING

- Use a standard USB-C DC 5 V / 2 A power supply. If a lower-power power source is used, the charging current will be reduced and charging may not function correctly.
- Do not connect the charger to a power source with a voltage higher than 5.5 V, as this may damage the charger.
- The short-circuit protection protects the charger but cannot prevent internal damage to a faulty battery.
- Do not charge damaged, unknown, corroded, or incompatible batteries.
- Keep the charger away from dust, heat sources, and direct sunlight.
- If the charger becomes unusually hot, emits an odor or smoke, or displays incorrect charging indications, immediately remove the batteries and disconnect the charger from the power supply.

CHARGING SPECIFICATIONS

Parameter	Value
Input	USB-C DC 5 V / 2 A
Charging current	0,5 A / 1 A / 2 A
Termination voltage	Li-ion 4,20 +/- 0,05 V; Ni-MH/Ni-Cd 1,48 +/- 0,1 V
Dimensions	123 x 60 x 30 mm
Weight	80,3 g (without batteries, including USB cable)

DECLARATION

The EVOLVEO CellCharge S2 is supplied without a USB power adapter and includes only a USB-C cable. The product does not contain a wireless module and is not a radio device.



DECLARATION OF CONFORMITY

Abacus Electric, s.r.o. declares that the EVOLVEO CellCharge S2 Universal LCD USB-C Battery Charger complies with the requirements of the following directives applicable to this product:

- Directive 2014/30/EU (EMC) – Electromagnetic Compatibility
- Directives 2011/65/EU and 2015/863/EU (RoHS) – Restriction of Hazardous Substances

The full text of the Declaration of Conformity is available at: <http://ftp.evolveo.com/ce/>



DISPOSAL

At the end of their service life, electrical equipment, batteries, and rechargeable batteries must be collected separately and disposed of through appropriate recycling systems. Do not dispose of them with household waste.

www.evolveo.cz/recycling



FSC certification applies to the packaging/paper materials marked with the FSC logo.

Importer / Manufacturer:

Abacus Electric, s.r.o.
Planá 2, 370 01, Czech Republic
helpdesk@evolveo.com

Made in P.R.C.

www.evolveo.com

Copyright © Abacus Electric, s.r.o.

Design and technical specifications are subject to change without prior notice.

SK

Návod vo vašom jazyku si môžete stiahnuť na adrese ftp.evolveo.eu/cell-chargers/cellcharge-s2/manual/ alebo po naskenovaní tohto QR kódu:

HU

A használati útmutató az Ön nyelvéen letölthető az ftp.evolveo.eu/cell-chargers/cellcharge-s2/manual/ címen, vagy a következő QR-kód beolvasásával:

RO

Manualul în limba dumneavoastră poate fi descărcat de la adresa ftp.evolveo.eu/cell-chargers/cellcharge-s2/manual/ sau prin scanarea acestui cod QR:

